


Flat 20'

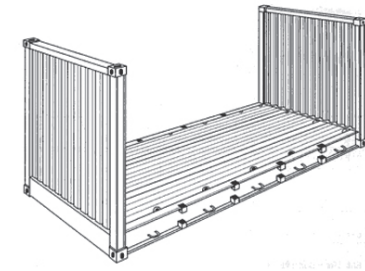

20'
8' HIGH
8' 6" HIGH

Construction	Inside Dimensions						Weights		
	Length of floor	Length between Corner Posts	Width of floor	Width between stanchions	Height	Height of Bottom	Max. Gross	Tare	Max Payload
8ft high									
Steelframe with fixed endwalls and softwood floor	5,918mm 19ft 5	5,625mm 18ft 5 ^{3/8}	2,398mm 7ft 10 ^{3/8}	2,208mm 7ft 2 ^{7/8}	2,172mm 7ft 1 ^{1/2}	265mm 10ft ^{1/2}	24,000kg 52,910lbs	2,800kg 6,170lbs	21,200kg 46,740lbs
8ft 6 high									
Steelframe with fixed endwalls and softwood floor	5,902mm 19ft 4 ^{3/8}	5,700mm 18ft 8 ^{3/8}	2,358mm 7ft 8 ^{7/8}	2,235mm 7ft 4	2,276mm 7ft 5 ^{5/8}	315mm 1ft ^{3/8}	24,000kg 52,910lbs	2,720kg 6,000lbs	21,280kg 46,910lbs
	5,980mm 19ft 7 ^{3/8}	5,698mm 18ft 8 ^{3/8}	2,230mm 7ft 3 ^{3/4}	2,245mm 7ft 4 ^{3/8}	2,255mm 7ft 4 ^{3/4}	336mm 1ft ^{11/4}	24,000kg 52,910lbs	2,500kg 5,510lbs	21,500kg 47,400lbs
	5,962mm 19ft 6 ^{3/4}	5,672mm 18ft 7 ^{1/4}	2,242mm 7ft 4 ^{1/4}	2,242mm 7ft 4 ^{1/4}	2,261mm 7ft 5	330mm 1ft 1	30,000kg 66,140lbs	2,200kg 4,850lbs	27,800kg 61,290lbs
Steel container with collapsible endwalls and softwood floor	5,956mm 19ft 6 ^{1/2}	5,658mm 18ft 6 ^{3/4}	2,418mm 7ft 11 ^{1/8}	2,181mm 7ft 1 ^{7/8}	2,320mm 7ft 7 ^{3/8}	271mm 10ft ^{5/8}	33,050kg 72,860lbs	3,045kg 6,710lbs	30,005kg 66,150lbs
Steel container with collapsible flush folding endwalls – can be converted to a platform	5,950mm 19ft 6 ^{1/4}	5,675mm 18ft 7 ^{3/8}	2,428mm 7ft 11 ^{5/8}	2,213mm 7ft 3 ^{1/8}	2,270mm 7ft 5 ^{3/8}	316mm 1ft ^{3/8}	33,000kg 72,752lbs	2,600kg 5,732lbs	30,400kg 67,020lbs
	6,038mm 19ft 9 ^{3/4}	5,638mm 18ft 6	2,208mm 7ft 2 ^{7/8}	2,438mm 8ft	2,235mm 7ft 4	370mm 1ft 2 ^{9/16}	30,480kg 67,200lbs	2,520kg 5,560lbs	27,960kg 61,640lbs
	6,038mm 19ft 9 ^{3/4}	5,612mm 18ft 4 ^{7/8}	2,210mm 7ft 2 ^{7/8}	2,438mm 8ft	2,213mm 7ft 3 ^{1/8}	370mm 1ft 9 ^{1/16}	34,000kg 74,956lbs	2,740kg 6,040lbs	31,260kg 68,910lbs