


# Flat 40'

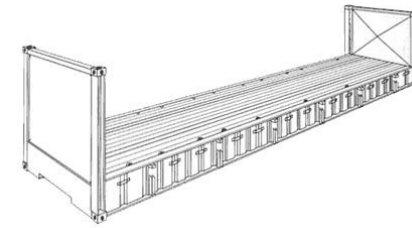

# 40'

---

## 8' 6" HIGH

Construction	Inside Dimensions						Weights		
	Length of Floor	Length Between	Width of Floor	Width between	Height	Height of Bottom	Max Gross.	Tare	Max. Payload
<b>8ft 6 high</b>									
<b>Steelframe with fixed endwalls and softwood floor</b>	12,010mm 39ft 4 <sup>7/8</sup>	11,832mm 38ft 9 <sup>7/8</sup>	2,228mm 7ft 3 <sup>3/4</sup>	2,228mm 7ft 3 <sup>3/4</sup>	1,981mm 6ft 6	610mm 2ft	30,480kg 67,200lbs	4,200kg 9,265lbs	26,280kg 57,935lbs
	12,086mm 39ft 7 <sup>7/8</sup>	11,826mm 38ft 9 <sup>5/8</sup>	2,224mm 7ft 3 <sup>1/2</sup>	2,224mm 7ft 3 <sup>1/2</sup>	1,981mm 6ft 6	610mm 2ft	30,480kg 67,200lbs	4,200kg 9,265lbs	26,280kg 57,935lbs
	12,010mm 39ft 4 <sup>7/8</sup>	11,826mm 38ft 9 <sup>5/8</sup>	2,244mm 7ft 4 <sup>3/8</sup>	2,204mm 7ft 2 <sup>3/4</sup>	1,981mm 6ft 6	610mm 2ft	30,480kg 67,200lbs	4,200kg 9,265lbs	26,280kg 57,935lbs
<b>Steel container with collapsible flush-folding endwalls – can be converted to a platform and softwood floor</b>	12,164mm 39ft 10 <sup>7/8</sup>	11,686mm 38ft 4	2,343mm 7ft 8 <sup>1/4</sup>	2,173mm 7ft 1 <sup>1/2</sup>	1,955mm 6ft 5	647mm 2ft 1 <sup>1/2</sup>	45,000kg 99,210lbs	5,800kg 12,800lbs	39,200kg 86,410lbs
	5,950mm 19ft 6 <sup>1/4</sup>	5,675mm 18ft 7 <sup>3/8</sup>	2,428mm 7ft 11 <sup>5/8</sup>	2,213mm 7ft 3 <sup>1/8</sup>	2,270mm 7ft 5 <sup>3/8</sup>	316mm 1 <sup>3/8</sup>	33,000kg 72,752lbs	2,600kg 5,732lbs	30,400kg 67,020lbs
<b>Steel container with collapsible flush-folding endwalls – can be converted to a platform</b>	6,038mm 19ft 9 <sup>3/4</sup>	5,638mm 18ft 6	2,208mm 7ft 2 <sup>7/8</sup>	2,438mm 8ft	2,235mm 7ft 4	370mm 1ft 2 <sup>9/16</sup>	30,480kg 67,200lbs	2,520kg 5,560lbs	27,960kg 61,640lbs
	6,038mm 19ft 9 <sup>3/4</sup>	5,612mm 18ft 4 <sup>7/8</sup>	2,210mm 7ft 2 <sup>7/8</sup>	2,438mm 8ft	2,213mm 7ft 3 <sup>1/8</sup>	370mm 1ft 2 <sup>9/16</sup>	34,000kg 74,956lbs	2,740kg 6,040lbs	31,260kg 68,910lbs